

Specifications

Model name	SQ47	SQ57
Effective length	90 to 6,240mm	70 to 6,270mm
Accuracy	±(1.5+1.5L/1000)μm	
Resolution	Selectable from 0.005/0.05/0.1/0.5/1μm	
Maximum response speed	200m/min(with serial communication)	
Vibration resistance	250m/s²	
Impact resistance	980m/s²	
Protective design grade	IP67	
Maximum consumption current	1.3W	
Power supply voltage	DC5V±5%	
Operating temperature	0 to 50°C	
Output signal	Compatible with each serial interface	
Option	Connection cable: CH23 series	



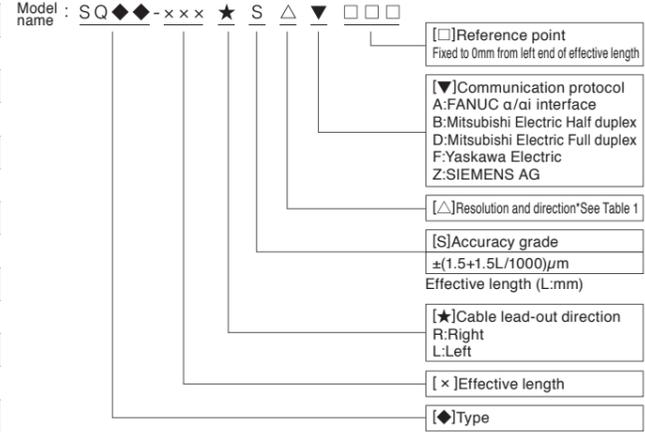


Table1

Model name	Direction	Resolution	Model name	Direction	Resolution
S		0.005μm	T		0.005μm
A		0.01μm	F		0.01μm
B		0.05μm	G		0.05μm
C	+	0.1μm	H	-	0.1μm
D		0.5μm	J		0.5μm
E		1μm	K		1μm

SQ37 : coming soon

Dimensions

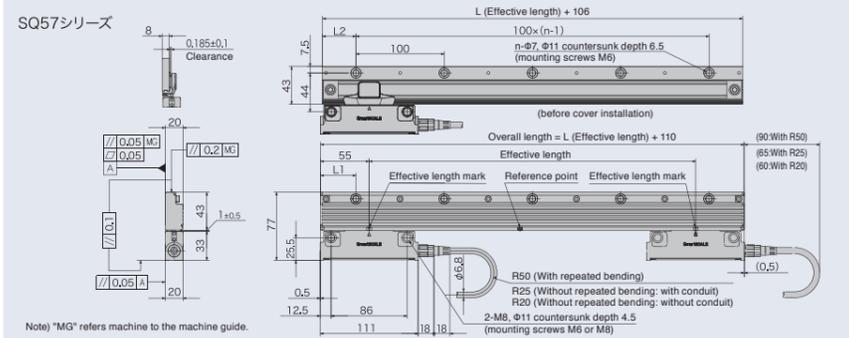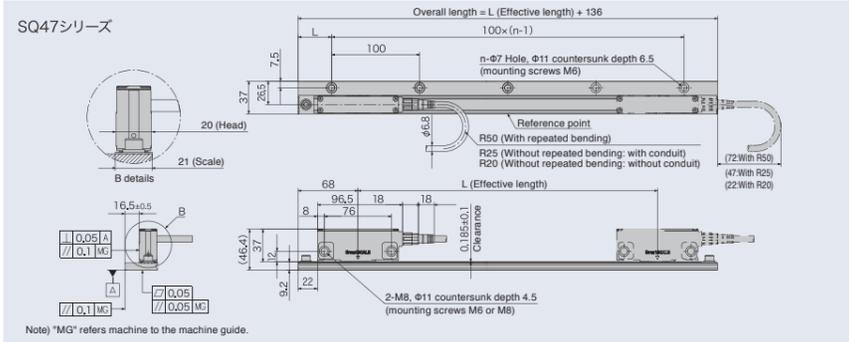

Lineup



Magnescale

SPEED X PRECISION

Absolute type
SmartSCALE

Stronger resistance to harsh environments

⚠ To use this product safely, please read the instruction manual carefully and thoroughly prior to usage. *Magnescale reserves the right to change products and specifications without prior notice.

Magnescale Co., Ltd.

Headquarters : 45 Suzukawa, Isehara-shi, Kanagawa 259-1146, Japan TEL.+81 (0)463 92 1011 FAX.+81 (0)463 92 1012
 International Sales Department : 45 Suzukawa, Isehara-shi, Kanagawa 259-1146, Japan TEL.+81 (0)463 92 7971 FAX.+81 (0)463 92 7978
 Magnescale Americas Inc. : 5740 Warland Drive, Cypress, CA 90630, USA TEL.+1 (562)594 5060 FAX.+1 (562)594 5061
 Magnescale Europe GmbH : Antoniusstrasse 14, 73249 Wernau, Germany TEL.+49(0)7153 934 291 FAX.+49(0)7153 934 299
 Service & Parts : 45 Suzukawa, Isehara-shi, Kanagawa 259-1146, Japan TEL.+81 (0)463 92 2132 FAX.+81 (0)463 92 3090


<http://www.magnescale.com>

The contents of this literature are as of Nov.2017

Magnescale Co., Ltd.

Stronger resistance to harsh environments

Air purging not necessary

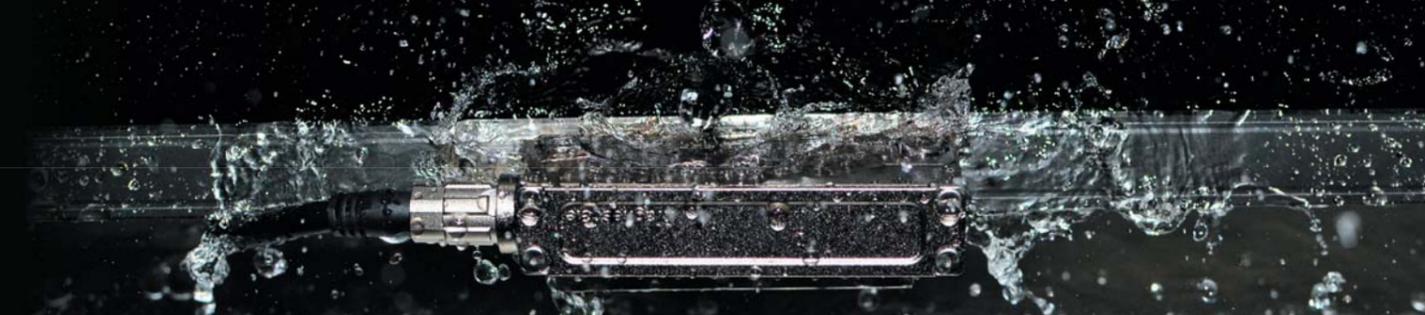


Wide gap and clearance tolerance

Gap between scale and head : 2 times greater than current model.
Clearance tolerance between scale and head : 5 times greater than current model.



Separate type simple architecture

Space saving design by bearingless and miniaturization enables encoders to install near works and multiple encoders in one axis.

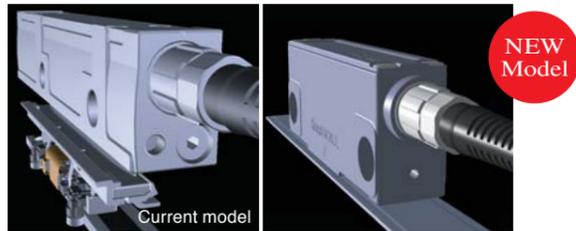

5nm high-resolution

Achieves best in class 5nm resolution by utilizing the latest interpolation technology with a newly developed algorithm.


Sealed structure with IP67 grade

The magnetic encoder and detection device are fully protected by a 50µm thin metal cover.
High resistance to coolant/water splashing and to sludge/metal chips provides stable operation under harsh environments.



Principle


Detection Principle
A thin-film MR element with a high-precision, low-distortion pattern arrangement is used as the detecting element. The resistance value of the MR element changes when the magnetic field acting on the element changes due to an alteration in the relative position between the element and the magnetic media. This change in resistance value is read electronically to detect the amount of positional change.

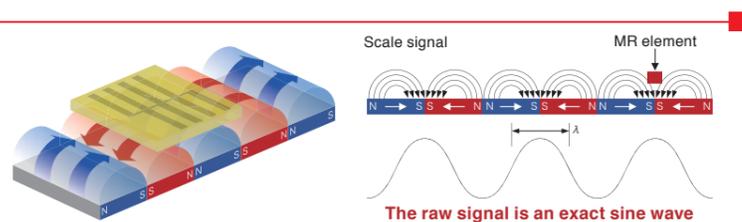

New technology


Development of a new magnetic medium

The output detection signal has improved 30% by changing the composition and consistency of the magnetic medium of the scale, and by improving the production method.

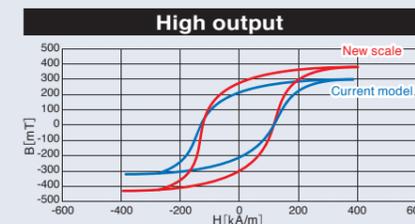

The development of a high sensitivity sensor using a new TMR device

Utilizes a low strain sensor enabling 10 times higher sensitivity compared to the current model by the development of a TMR element based on the Spin-Valve method.

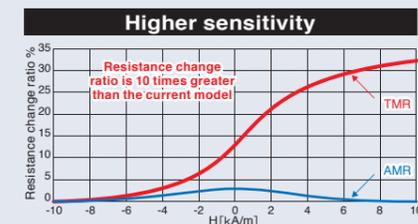

New interpolation calculation method

Achieves 5nm resolution and improves interpolation accuracy by utilizing a new interpolation calculation method.

